


Kaynaklı Bağlantı Noktası Net0951K



Art.No.	Ölçü	Direkt kapasite (t)	LC* (kN)	Ölçüler (mm)							Ağırlık (kg)
				A	B	C	D	E	F	L	
2951 10 01	M6	1.12	22	35	41	36	13	28	66	40	0.39
2951 20 01	M8	2.00	40	38	42	39	13	33	74	44	0.51
2951 30 01	M10	3.15	63	42	45	43	17	34	80	49	0.70
2951 50 01	M13	5.3	100	60	55	50	22	44	95	55	1.50
2951 80 01	M16	8.00	160	70	70	65	26	53	108	70	2.60
2951 15 01	M22	15.00	300	90	97	90	34	73	155	92	5.85

* Bağlama / gerdirme kapasitesi

DIN EN1677-1 standardına uygundur.

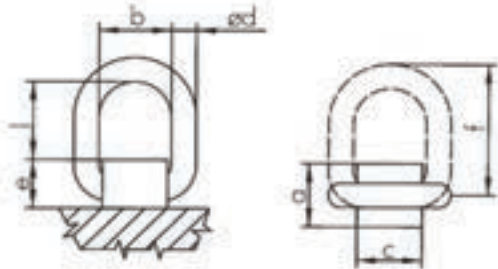

Kapasite (t)					
0° Tek Bacak	0° İki Bacak	0-45° İki Bacak	45-60° İki Bacak	0-45° 3-4 Bacak	45-60° 3-4 Bacak
1.12	2.24	1.6	1.12	2.4	1.7
2.00	4	2.8	2.00	4.2	3.0
3.15	6.30	4.5	3.15	6.8	4.7
5.30	10.60	7.5	5.30	11.3	8.0
8.00	16	11.3	8.00	17.0	12.0
15.00	30	21.2	15.00	31.8	22.5